


PLANS OF TYPICAL LAYOUT OF BRICK PAVING

(OTHER PATTERNS WITHIN HEADERS SUBJECT TO APPROVAL)

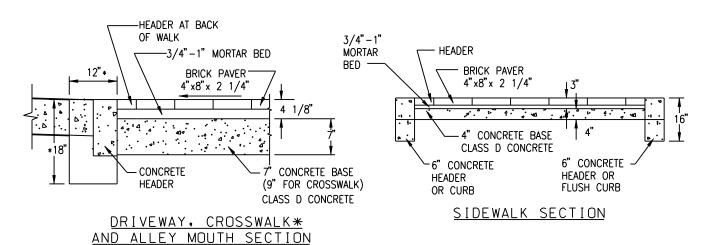

TYPICAL SECTIONS

CONSTRUCTION NOTES

- 1. TRANSVERSE SLOPE AND SPACING OF EXPANSION JOINTS ARE TO CONFORM TO NORMAL SIDEWALK STANDARDS.
- 2. ALL BRICK SIDEWALKS SHALL HAVE A LONGITUDINAL HEADER COURSE ON BOTH SIDES.
- 3. MORTAR TO BE 1 PART PORTLAND CEMENT AND 5 PARTS SAND.
- 4. PORTLAND CEMENT-ASTM-C 150" TYPE 1.
- 5. SAND ASTM-C-144

REVISIONS	STANDARDS FOR
	STREET IMPROVEMENTS
	BRICK CROSSWALK,
	ALLEY MOUTH
	AND SIDEWALK
	CITY OF BAYTON OUIO
	CITY OF DAYTON, OHIO NO SCALE 14A-17113
	INU SCALE 14A-1/113